


# 175D

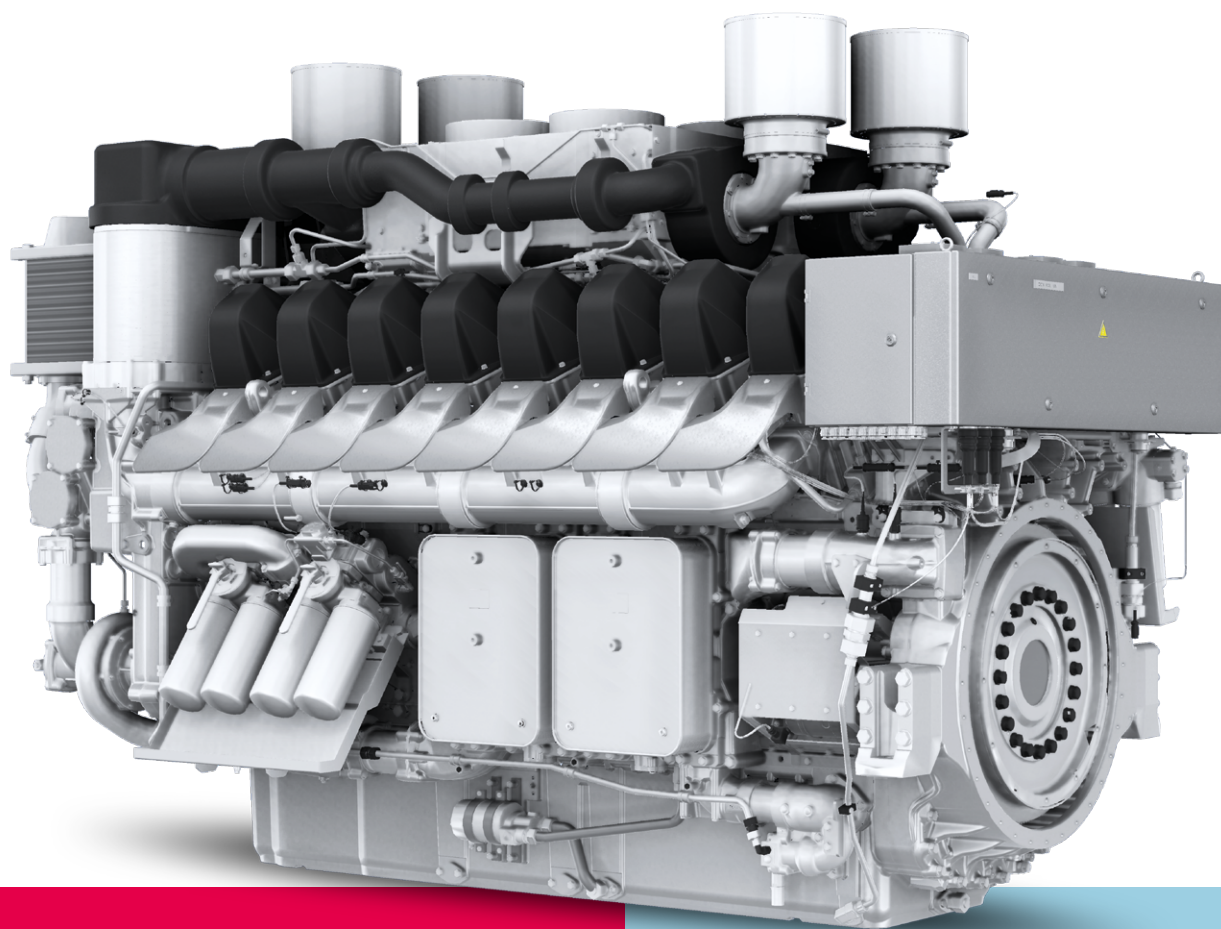

Packing the latest technology into a minimum volume, the 175D is characterized by a clear-cut design: easy to commission, easy to operate, and easy to service. Its modular design allows it to meet all the challenges of many different applications.

**Benefits at a glance**

- Low fuel oil consumption
- Low operating costs
- Low life cycle costs
- Long service life


# 175D

Propulsion

## Dimensions

<b>Cyl. No.</b>	<b>12V</b>
L <sub>1</sub> (mm)	2,734
L <sub>2</sub> (mm)	167
L <sub>3</sub> (mm)	2,901
H (mm)	2,295
W (mm)	1,661
Dry mass (t)	8.80

Configuration shown: 12V175D-MM  
without seawater cooler

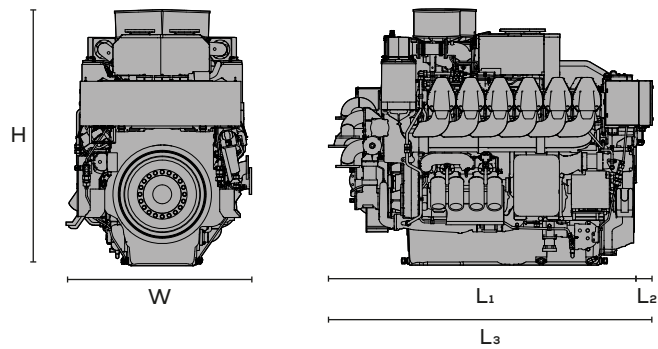


## Output

Engine Model	12V175D-MH	12V175D-MM				12V175D-ML			
Rating Definitions	Heavy Duty	Medium Duty				Light Duty			
MCR (kW)	1,740	1,860	1,920	2,040	2,220*	2,220	2,400*	2,400	2,580
Speed (rpm)	1,800	1,800	1,800	1,800	1,800	1,900	1,800	2,000	2,000
Average load (%)	85.0	80.0	80.0	70.0	40.0	65.0	40.0	60.0	60.0
SFOC [g/kWh] at 100% MCR, Tier II	192.5	191.0	193.0	191.0	191.5	195.0	193.0	197.5	202.0
SFOC [g/kWh] at 100% MCR, Tier III	193.0	192.0	194.0	191.5	193.0	196.0	193.0	198.0	-

## Dimensions

<b>Cyl. No.</b>	<b>16V</b>
L <sub>1</sub> (mm)	3,254
L <sub>2</sub> (mm)	167
L <sub>3</sub> (mm)	3,421
H (mm)	2,316
W (mm)	1,661
Dry mass (t)	10.85

Configuration shown: 16V175D-MM  
without seawater cooler

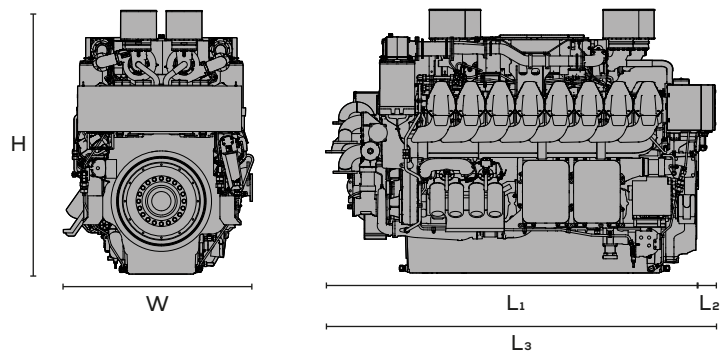

## Output

Engine Model	16V175D-MM				16V175D-ML
Rating Definitions	Medium Duty				Light Duty
MCR (kW)	2,560	2,720	2,960*	2,960	3,200
Speed (rpm)	1,800	1,800	1,800	1,900	2,000
Average load (%)	80.0	70.0	40.0	65.0	60.0
SFOC [g/kWh] at 100% MCR, Tier II	193.0	191.0	192.5	196.0	197.5
SFOC [g/kWh] at 100% MCR, Tier III	194.0	192.5	194.0	197.0	198.0


# 175D

## Propulsion

### Dimensions

Cyl. No.	20V
L <sub>1</sub> (mm)	3,774
L <sub>2</sub> (mm)	167
L <sub>3</sub> (mm)	3,941
H (mm)	2,297
W (mm)	1,647
Dry mass (t)	13.10

Configuration shown: 20V175D-MM  
without seawater cooler

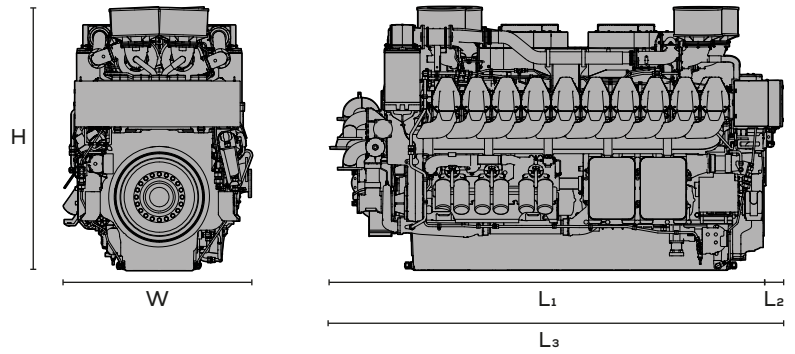

### Output

Engine Model	20V175D-MM			20V175D-ML	
Rating Definitions	Medium Duty			Light Duty	
MCR (kW)	3,400	3,700*	3,700	4,000	4,400
Speed (rpm)	1,800	1,800	1,900	2,000	2,000
Average load (%)	70.0	40.0	65.0	60.0	60.0
SFOC [g/kWh] at 100% MCR, Tier II	191.0	191.5	194.0	197.5	199.0
SFOC [g/kWh] at 100% MCR, Tier III	191.5	193.0	195.0	198.0	-

For multi-engine arrangement only. Rated power output according to ISO 3046-1: ICFN. The power produced at the flywheel will be within the tolerance of 3% - according to ISO 15550:2002 (E) - up to 45°C (113°F) combustion air temperature measured at the engine air inlet and up to 38°C (100°F) sea or raw water temperature measured at the seawater pump suction inlet, unless other values mentioned explicitly.

Specific fuel oil consumption acc. to ISO 3046-1:2002 based on a lower calorific value of fuel 42,700 kJ/kg with attached lube oil, HT and LT cooling water pumps fulfilling IMO Tier II/Tier III emission limits with 5% tolerance. Everlence diesel engines are specified according to vibration class 5 of DIN ISO 10816-6 (vibration limit evaluation zone A/B: 28.2 mm/s, rms, 2-1,000 Hz, stationary conditions at nominal operating point)

\* for tug application only Last updated: May 2025

### General

- Modular common rail fuel injection system
- Integrated lubrication system
- HT and LT split cooling circuits with integrated pumps and thermostats
- High-efficiency turbochargers
- SaCoS 5000 safety and control system
- Compliant to SOLAS requirements for admissible surface temperature without additional insulation
- Classed by all major Classification societies

### Starting method

- Electric / pneumatic

### Compliance with emission regulations

- IMO Tier II
- IMO Tier III (with SCR)

### Optional equipment

- Integrated seawater cooler and engine-driven seawater pump
- Lube oil centrifuge
- 100 % PTO on counter coupling side (12V engine only)
- PTO on counter coupling side (16V and 20V engines)
- Alternator for battery charging
- Horizontal exhaust gas outlet (12V engine only)
- Redundant starter
- Redundant lube oil supply
- Additional auxiliary PTO on engine sides at counter coupling end

MCR = Maximum Continuous Rating  
SCR = Selective Catalytic Reduction  
SFOC = Specific Fuel Oil Consumption

# 175D

Propulsion

## Everlence

86224 Augsburg, Germany

P + 49 821 322-0

F + 49 821 322-3382

[info@everlence.com](mailto:info@everlence.com)

[www.everlence.com](http://www.everlence.com)

MAN Energy Solutions SE has been renamed to Everlence SE and its products are being rebranded from "MAN" and/or "MAN Energy Solutions" to "Everlence". As this is an ongoing process, any reference to "MAN" and/or "MAN Energy Solutions" is actually a reference to "Everlence". All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

Copyright © Everlence.  
EVRO00034EN-250600, GKM-AUG